

TOWN OF FREEPORT CULVERT REPLACEMENT HUNTER ROAD FREEPORT, MAINE

<u>TITLE</u>	<u>DWG NO</u>
COVER SHEET	
CULVERT REPLACEMENT PLAN, SECTIONS AND DETAILS	C-100
EROSION CONTROL NOTES AND DETAILS	C-300
SECTIONS AND DETAILS	C-301


LOCATION MAP





SME
Sevee & Maher Engineers, Inc.

ENVIRONMENTAL • CIVIL • GEOTECHNICAL • WATER • COMPLIANCE

4 Blanchard Road, PO Box 85A, Cumberland Center, Maine 04021
Phone 207.829.5016 • Fax 207.829.5692 • www.smemaine.com

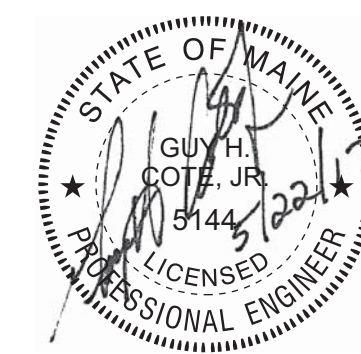

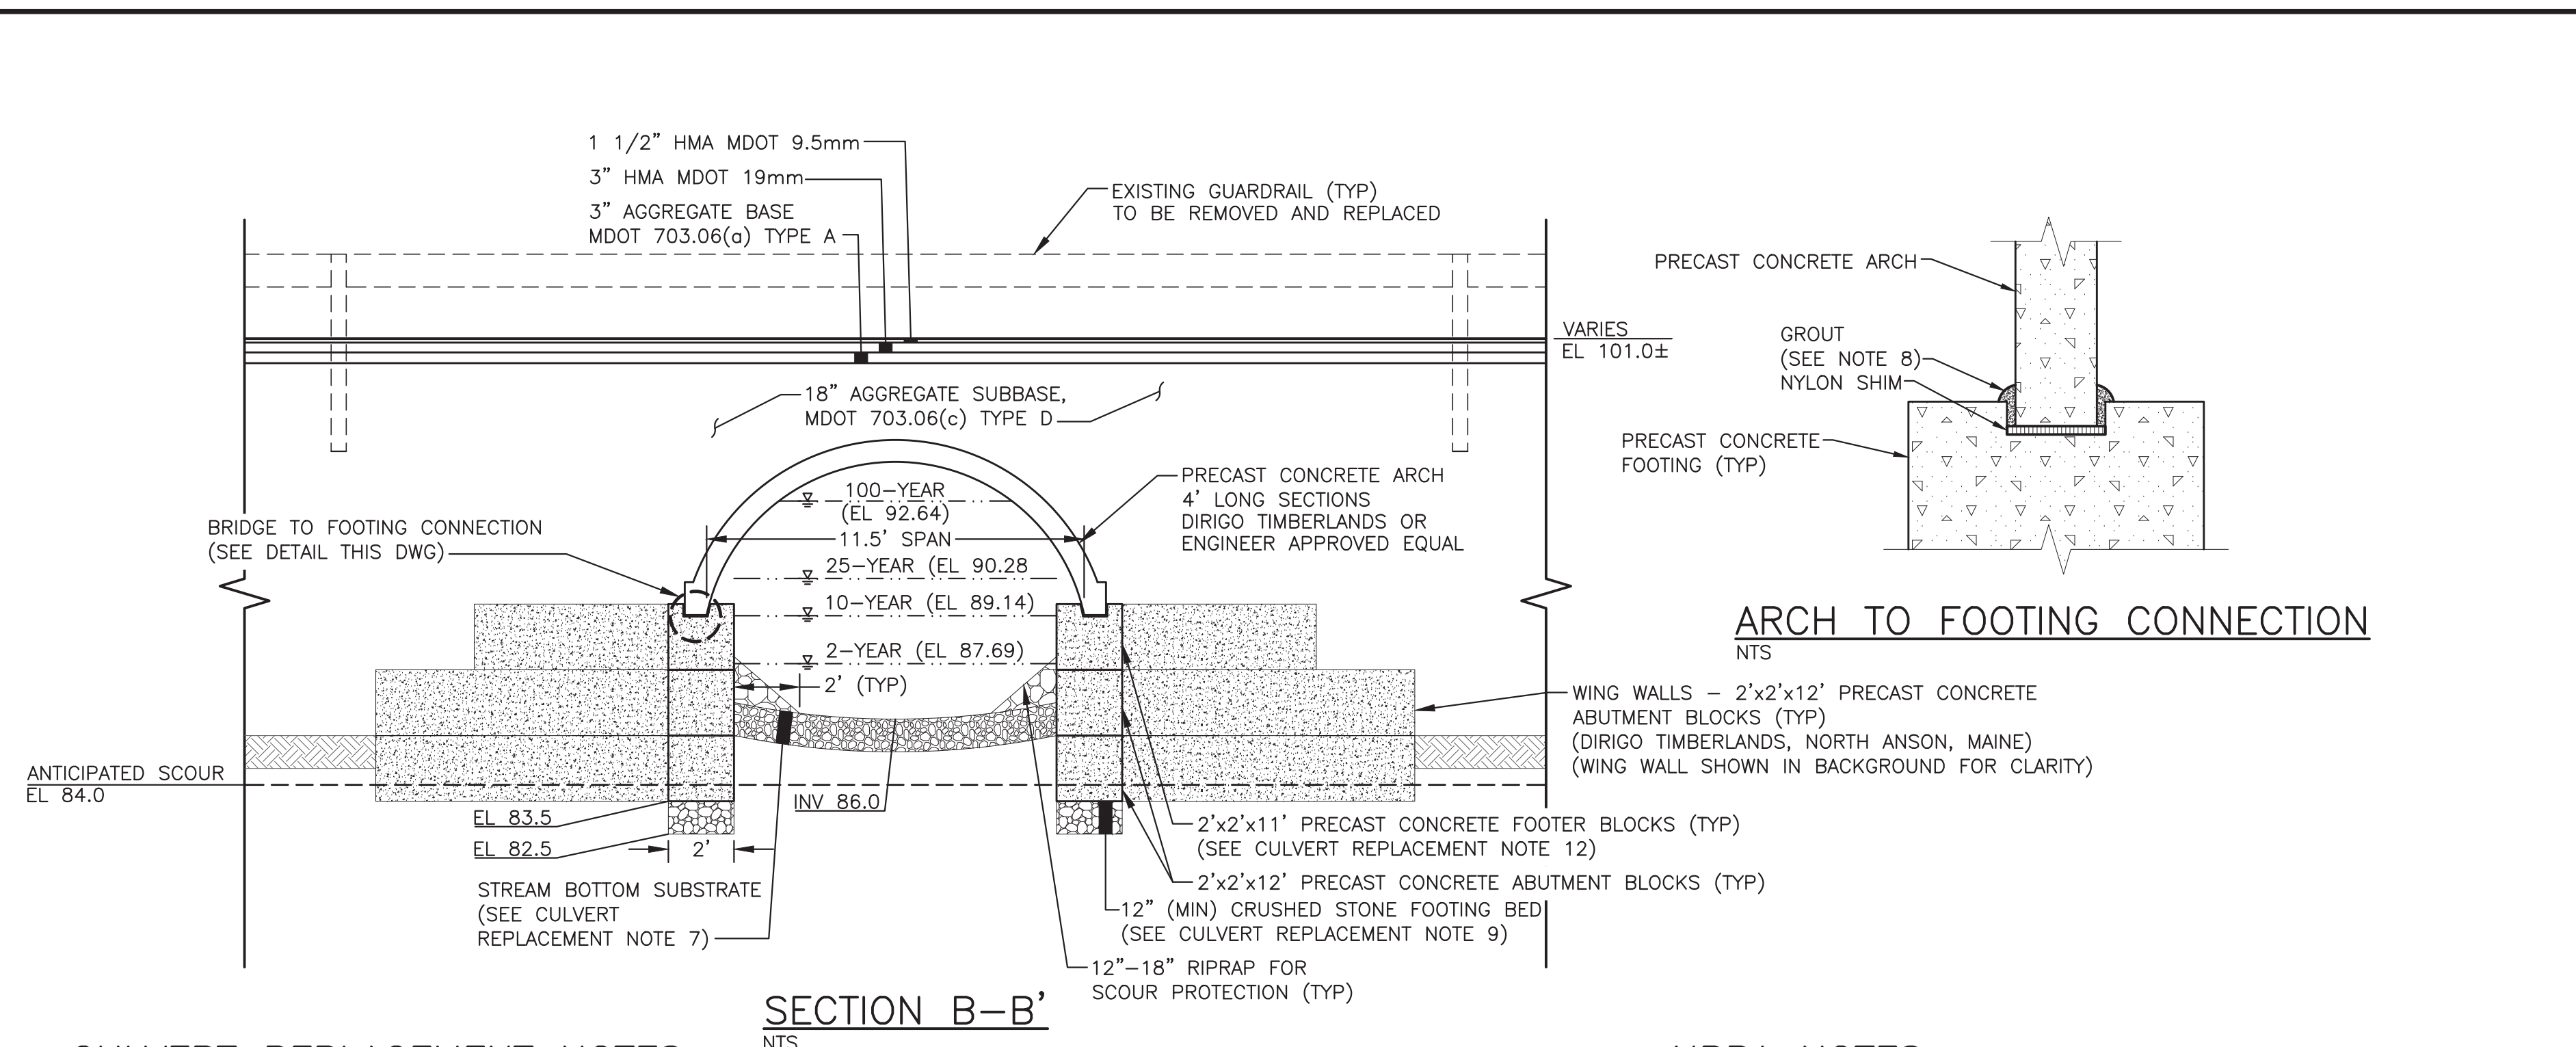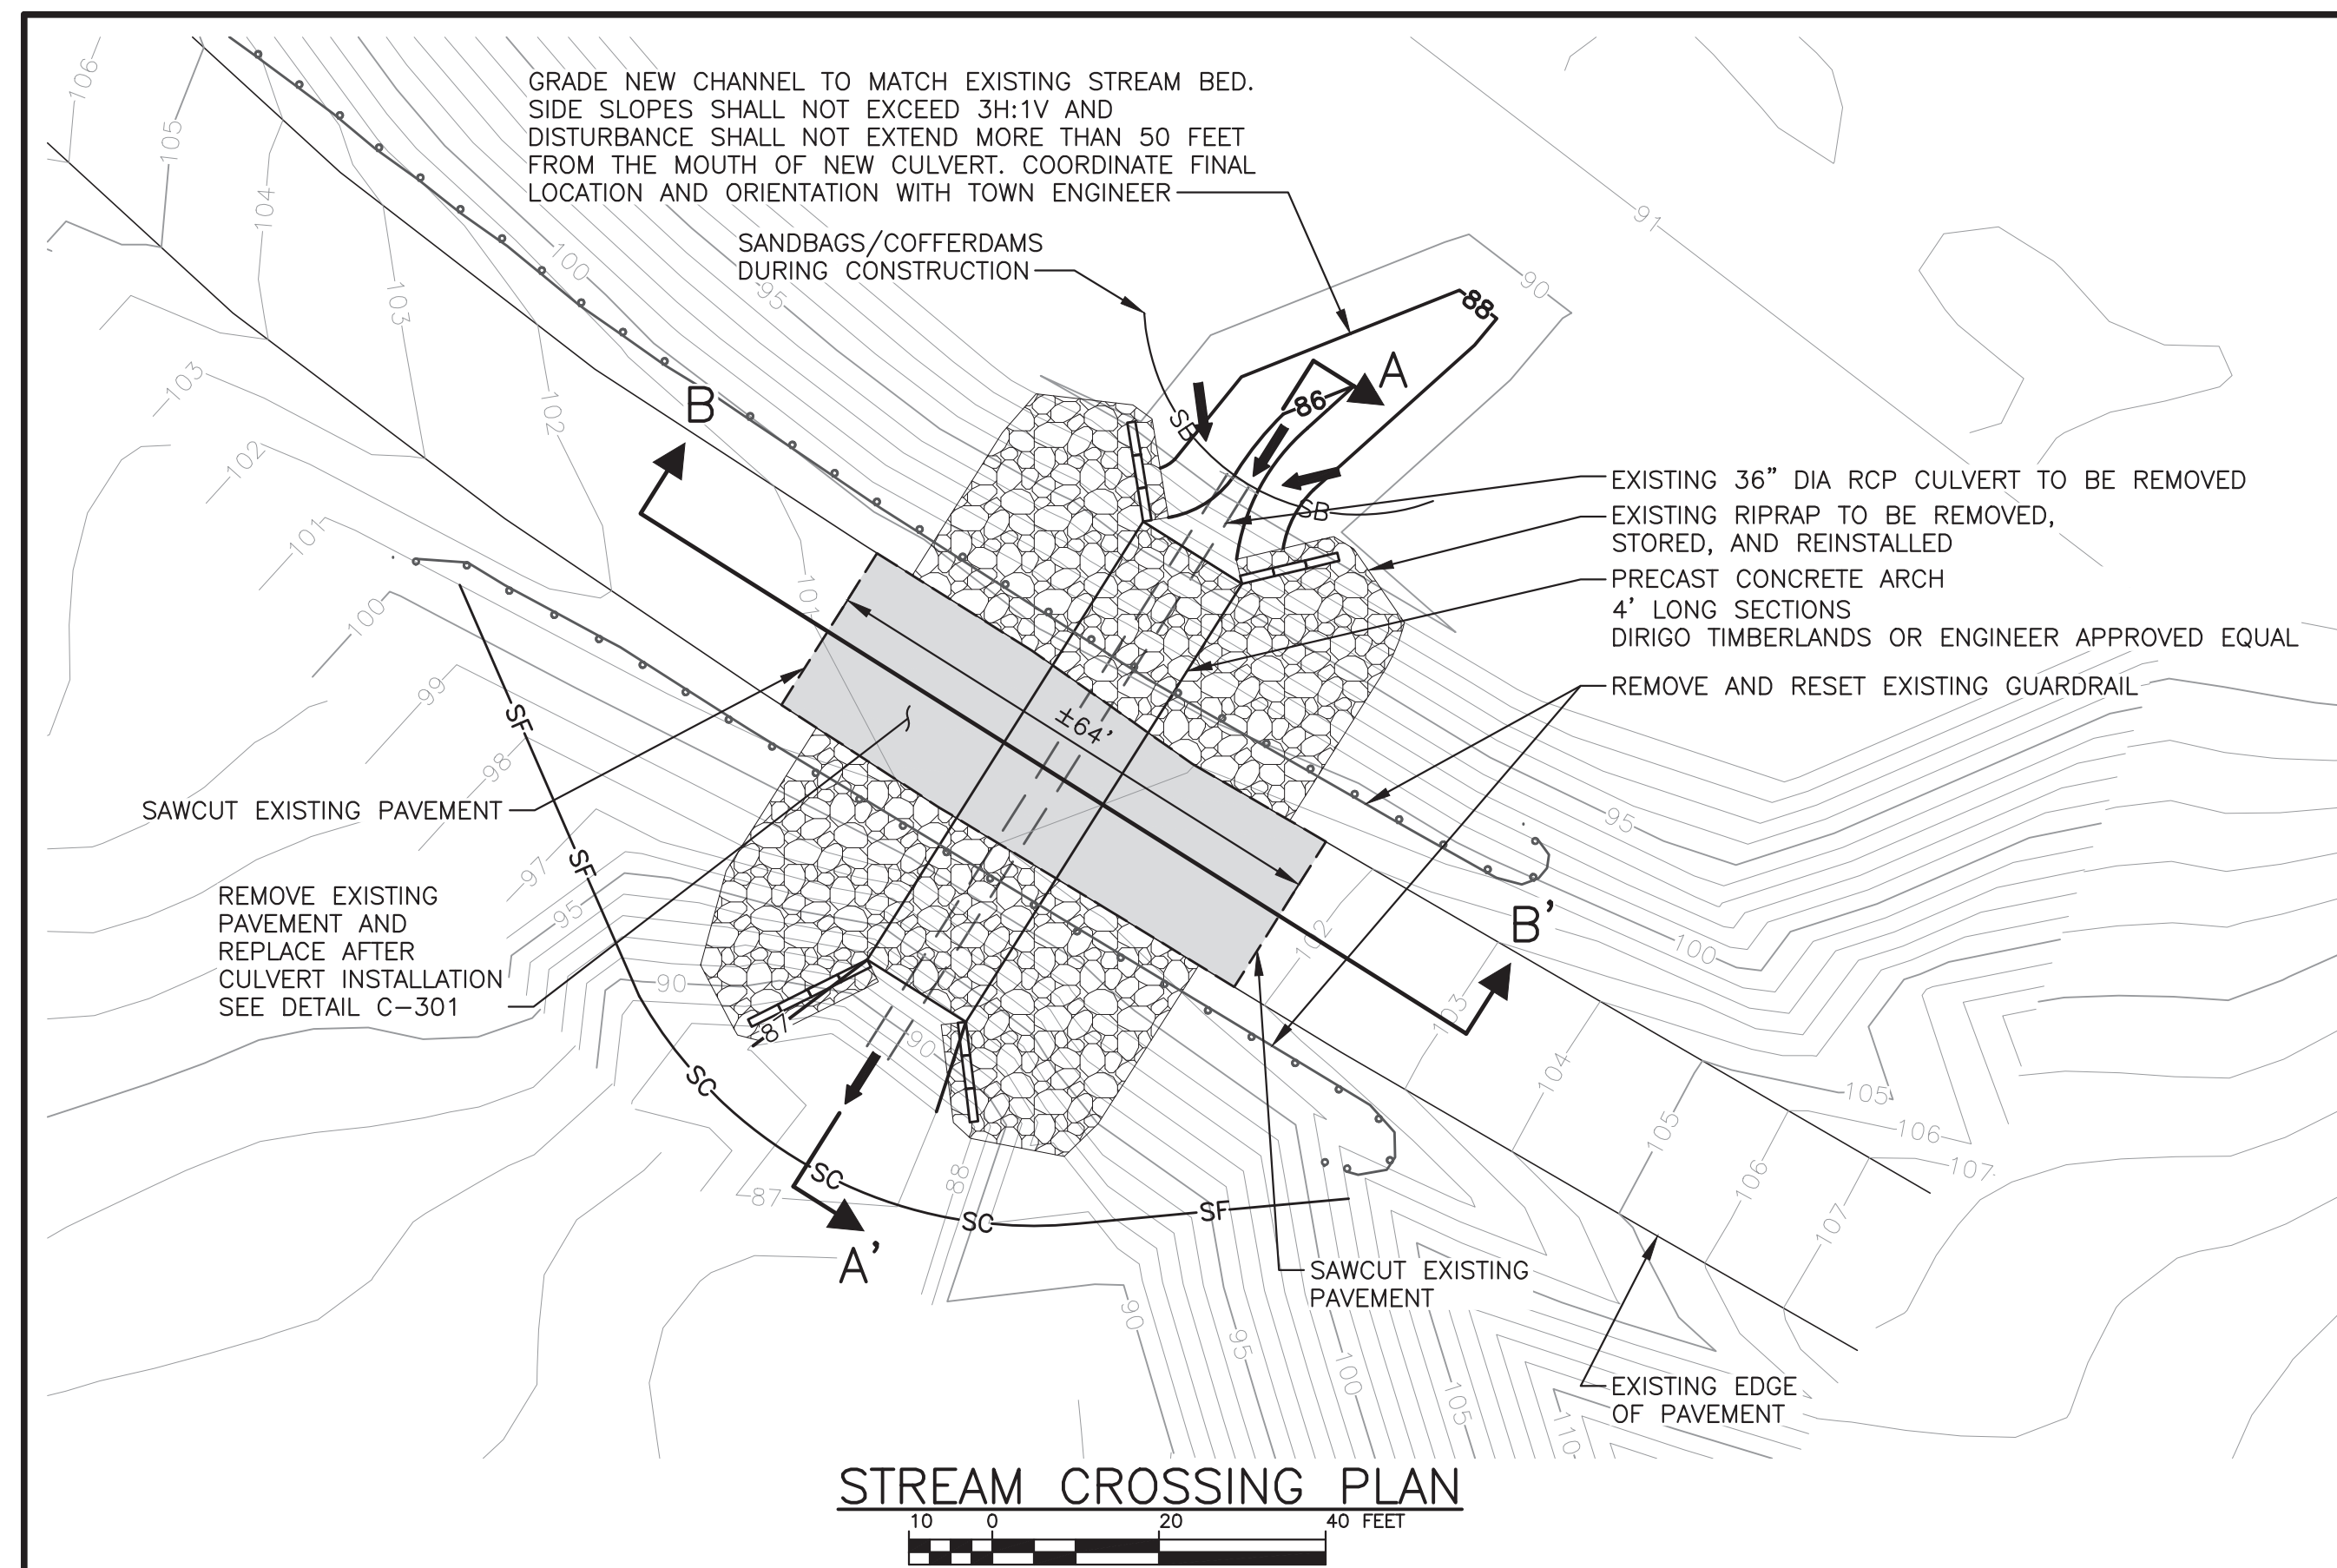

CULVERT REPLACEMENT NOTES:

- EXISTING CONDITIONS BASE MAP FROM SURVEY PERFORMED SME, DATED JANUARY 20, 2017.
- ALL WORK SHALL BE SCHEDULED TO START AFTER JULY 15, 2017 AND BE CONCLUDED BEFORE OCTOBER 1, 2017.
- ALL WORK SHALL BE IN ACCORDANCE WITH THE STREAM CROSSING STANDARDS CONTAINED IN THE STATE OF MAINE, DEPARTMENT OF ENVIRONMENTAL PROTECTION, NATURAL RESOURCE PROTECTION ACT, PERMIT BY RULE STANDARDS, CHAPTER 305, AS CURRENTLY REVISED. ADDITIONALLY ALL WORK SHALL MEET OR EXCEED THE EXPECTATIONS OF THE MAINE AUDUBON "STREAM SMART" GUIDELINE FOR FISH FRIENDLY STREAM CROSSINGS.
- EROSION AND SEDIMENT CONTROLS SHALL COMPLY WITH THE MAINE EROSION AND SEDIMENT CONTROL BMPs, DATED OCTOBER 2016, OR AS CURRENTLY REVISED.
- LOCATION, ORIENTATION AND INVERT OF PRECAST CONCRETE ARCH, FOOTINGS AND ABUTMENT BLOCKS MAY BE ADJUSTED TO MEET FIELD CONDITIONS FOUND AT THE TIME OF CONSTRUCTION.
- PRECAST CONCRETE ARCH, FOOTING BLOCKS AND ABUTMENT BLOCKS SHALL BE MANUFACTURED BY DIRIGO TIMBERLANDS OF NORTH ANSON, MAINE. ARCH SHALL CONSIST OF 48-INCH LONG SECTIONS, EACH WITH AN OPENING HEIGHT OF 56-INCHES AND A 138-INCH SPAN.
- MINIMIZE DISTURBANCE TO EXISTING SUBSURFACE STREAM BED MATERIAL TO THE GREATEST EXTENT POSSIBLE.
- GROUT SHALL BE NON-SHRINK SIKAGROUT 328 BY SIKA CORPORATION OR ENGINEER APPROVED EQUAL.

- 3/4-INCH CRUSHED STONE SHALL MEET THE FOLLOWING GRADATION:

SIEVE DESIGNATION	PERCENTAGE BY WEIGHT PASSING SQUARE MESH SIEVES
1 INCH	100.00
3/4 INCH	90-100
1/2 INCH	20-55
3/8 INCH	0-15
No. 4	0-5

- GRAVEL SHALL MEET THE REQUIREMENTS OF MDOT TYPE D GRAVEL (703.06C). MATERIAL SHALL NOT CONTAIN PARTICLES OF ROCK WHICH WILL NOT PASS THE 6-INCH SQUARE MESH SIEVE. THE GRADATION OF THE MATERIAL THAT PASSES THE 3-INCH SIEVE SHALL MEET THE FOLLOWING REQUIREMENTS:

SIEVE DESIGNATION	PERCENTAGE BY WEIGHT PASSING SQUARE MESH SIEVES
1/2 INCH	35-80
1/4 INCH	25-65
No. 40	0-30
No. 200	0-7.0

- PRECAST CONCRETE ARCH, WING WALLS AND FOOTINGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS REQUIREMENTS.
- FINAL FOOTING DIMENSIONS TO BE DETERMINED BASED ON INVESTIGATION OF SUBGRADE MATERIAL.


NRPA NOTES:

- ALL EXCAVATIONS SHALL BE DONE IN ACCORDANCE WITH OSHA STANDARDS.
- WHEELED OR TRACKED EQUIPMENT MAY NOT OPERATE IN THE WATER. EQUIPMENT OPERATING ON THE SHORE MAY, WHERE NECESSARY, REACH INTO THE WATER WITH A BUCKET OR SIMILAR EXTENSION. EQUIPMENT MAY CROSS STREAMS ON ROCK, GRAVEL OR LEDGE BOTTOM.
- IF WORK IS PERFORMED IN A RIVER, STREAM OR BROOK THAT IS LESS THAN THREE FEET DEEP AT THE TIME OF THE ACTIVITY AND AT THE LOCATION OF THE ACTIVITY, THE APPLICANT MUST PROVIDE FOR TEMPORARY DIVERSION OF FLOW TO THE OPPOSITE SIDE OF THE CHANNEL WHILE WORK IS IN PROGRESS.
 - DIVERSION MAY BE ACCOMPLISHED BY PLACING SANDBAGS, TIMBERS, SHEET STEEL, CONCRETE BLOCKS, 6+ MIL POLYETHYLENE OR GEOTEXTILES FROM THE BANK TO MIDSTREAM ON THE UPSTREAM SIDE OF THE ACTIVITY. NO MORE THAN TWO-THIRDS (2/3) OR 25 FEET OF STREAM WIDTH, WHICHEVER IS LESS, MAY BE DIVERTED AT ONE TIME.
 - ANY MATERIAL USED TO DIVERT WATER FLOW MUST BE COMPLETELY REMOVED UPON COMPLETION OF THE ACTIVITY, AND THE STREAM SUBSTRATE MUST BE RESTORED TO ITS ORIGINAL CONDITION.
 - A PUMP MAY BE OPERATED, WHERE NECESSARY, FOR A TEMPORARY DIVERSION. THE PUMP OUTLET MUST BE LOCATED AND OPERATED SUCH THAT EROSION OR THE DISCHARGE OF SEDIMENT TO THE WATER IS PREVENTED.

WATER CONTROL NOTES:

- WATER MUST BE CONTROLLED DURING CONSTRUCTION, BOTH MAINTAINING FLOW OF THE STREAM AT THE SITE, AND ELIMINATING POTENTIAL SEDIMENTATION AND EROSION.
- ANY FISH MUST THOROUGHLY AND CAREFULLY BE REMOVED AND EXCLUDED FROM THE WORK SITE BEFORE IN-STREAM WORK BEGINS (INCLUDING PROPERLY SCREENING PUMP INTAKES).
- ALL MAINE DEPARTMENT OF ENVIRONMENTAL PROTECTION BEST MANAGEMENT PRACTICES FOR SEDIMENT AND EROSION CONTROL MUST BE FOLLOWED.
- PRIOR TO THE START OF WORK, THE CONTRACTOR SHALL SUBMIT A DEWATERING PLAN OR STREAM BYPASS PLAN FOR PROPOSED CONSTRUCTION. THE PLAN SHOULD OUTLINE PROPOSED, MEANS, METHODS AND SEQUENCE OF WORK. OPTIONS INCLUDE USE OF COFFERDAMS AND/OR CONTINUOUS PUMPING OF STREAM FLOW.
- DIRTY WATER MUST BE REMOVED FROM THE WORK SITE AND FILTERED IN NEARBY FOREST TO AVOID CONTAMINATION OF THE STREAM.
- SUFFICIENT PUMP CAPACITY IS ESSENTIAL TO MAINTAIN WATER CONTROL, WITH BACKUP PUMPS ON HAND OR READILY AVAILABLE.

REV.	BY	DATE	STATUS
	JTR	5/17	ISSUED FOR BID
	JTR	5/17	REVISED PER TOWN ENGINEER COMMENTS
	JTR	4/17	REVISED PER TOWN ENGINEER COMMENTS
	JTR	3/17	ISSUED TO TOWN FOR APPROVAL

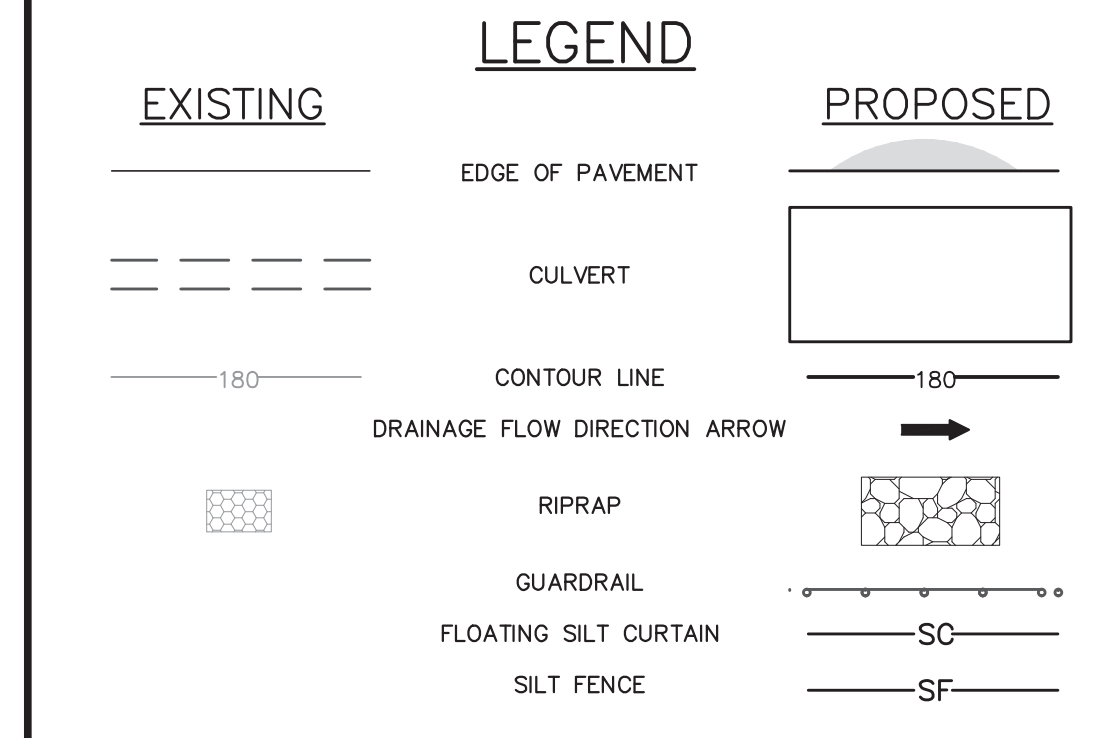


GENERAL SITE NOTES:

- EXCAVATE AND STOCKPILE ON-SITE TOPSOIL. TOPSOIL IS TO REMAIN THE PROPERTY OF THE TOWN OF FREEPORT DURING CONSTRUCTION, AND SHALL NOT BE REMOVED FROM THE SITE. AFTER FINAL LOAM AND SEED EXCESS TOPSOIL SHALL BE REMOVED FROM SITE BY CONTRACTOR.
- PROVIDE SIGNAGE AND BARRICADES TO PREVENT PEDESTRIANS FROM ENTERING THE WORK AREA THROUGHOUT CONSTRUCTION.

GRADING NOTES:

- ADD 6" LOAM, SEED AND MULCH TO DISTURBED AREAS UNLESS OTHERWISE NOTED. PROVIDE EROSION CONTROL MESH ON ALL SLOPES 6:1 OR STEEPER.
- MAINTAIN TEMPORARY EROSION CONTROL MEASURES FOR THE FULL DURATION OF CONSTRUCTION. INSPECT WEEKLY AND AFTER EACH STORM AND REPAIR AS NEEDED. REMOVE SEDIMENTS FROM THE SITE. PLACE IN AREA OF LOW EROSION POTENTIAL, AND STABILIZE WITH SEED AND MULCH.
- PLACE TEMPORARY SOIL STABILIZATION WITHIN 30 DAYS OF INITIAL DISTURBANCE. PLACE PERMANENT SOIL STABILIZATION WITHIN 7 DAYS OF FINAL GRADING.

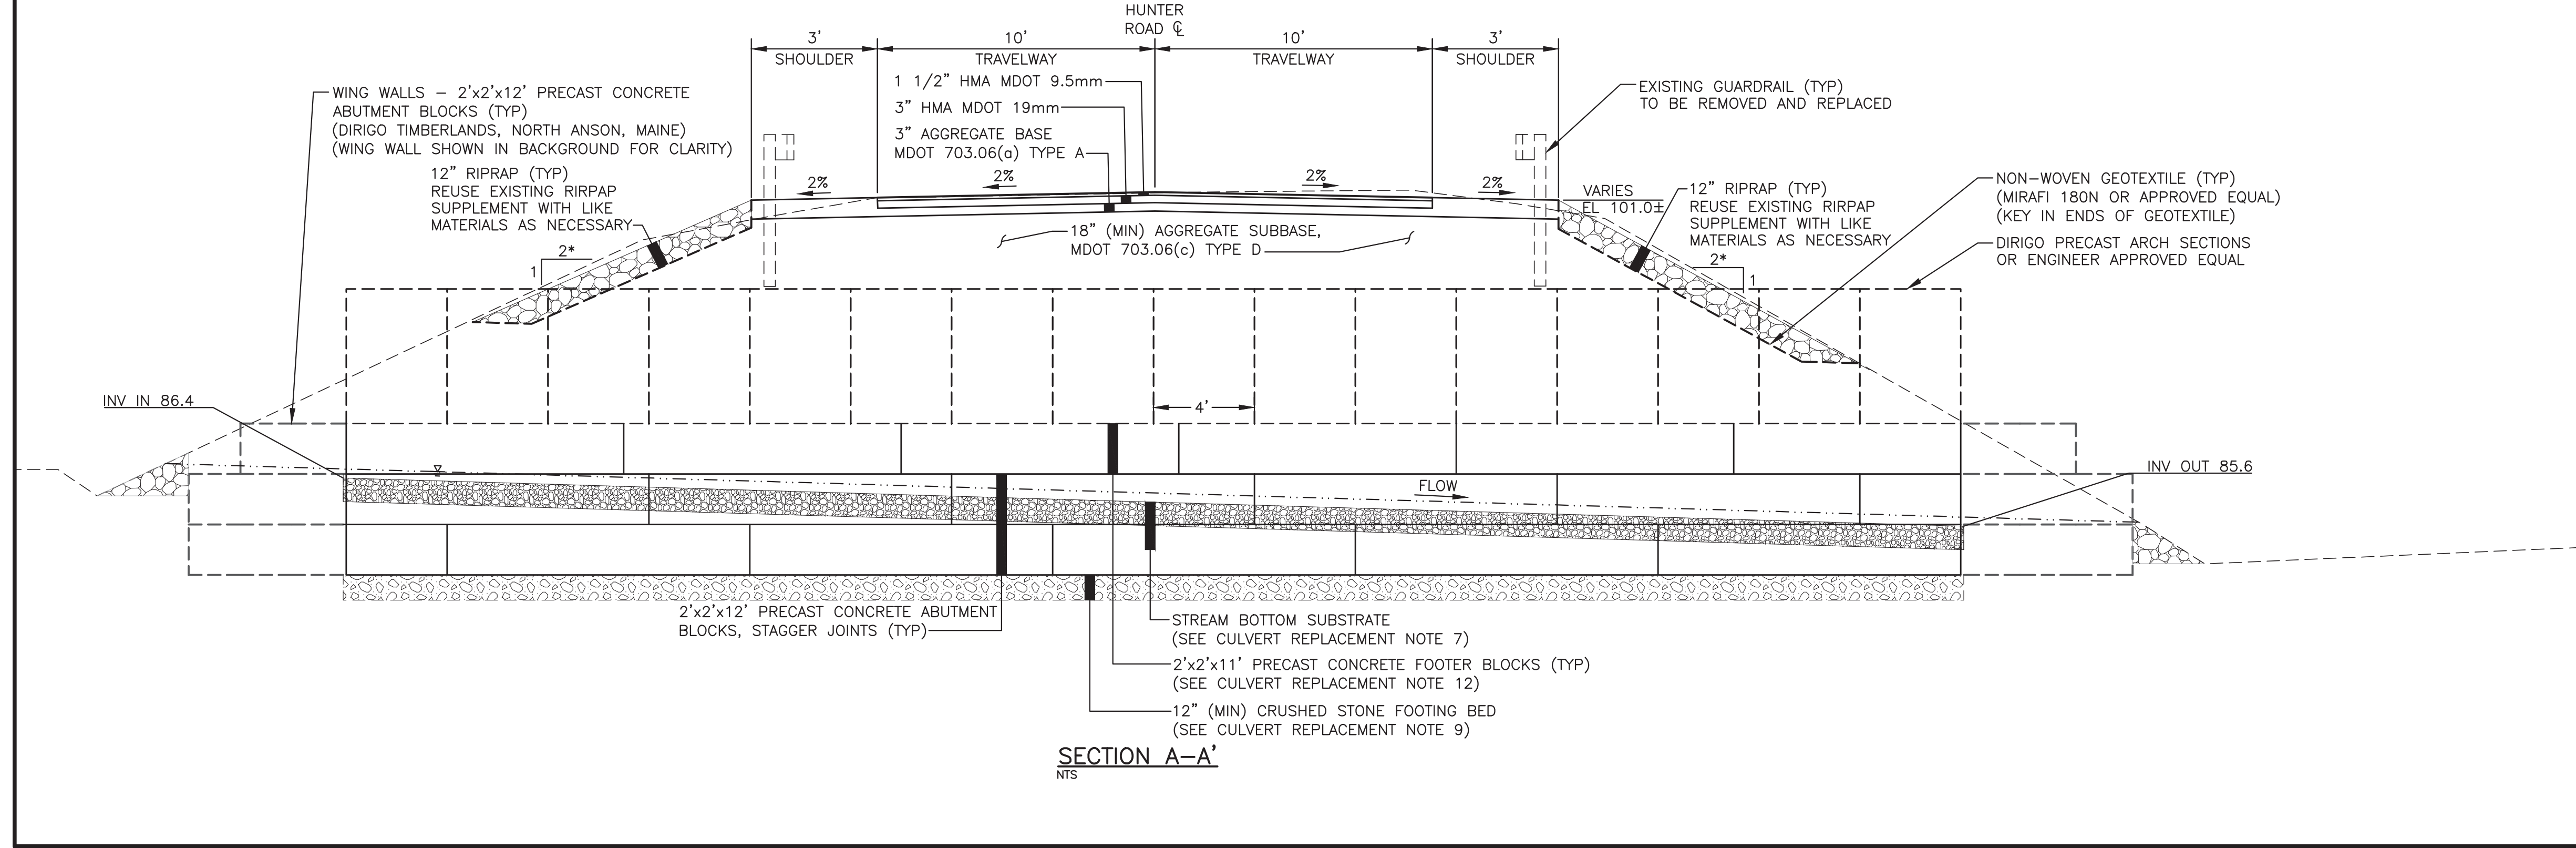

**TOWN OF FREEPORT
CULVERT REPLACEMENT
HUNTER ROAD
FREEPORT, MAINE
CULVERT REPLACEMENT PLAN,
SECTIONS AND DETAILS**

SME
Sevee & Maher Engineers, Inc.

ENVIRONMENTAL • CIVIL • GEOTECHNICAL • WATER • COMPLIANCE
4 Blanchard Road, PO Box 85A, Cumberland Center, Maine 04021
Phone 207.829.5016 • Fax 207.829.5692 • www.smemaine.com

DESIGN BY: CEB
DRAWN BY: SJM
DATE: 2/2017
CHECKED BY:
LMN: SITE
CTB: SME-STD

JOB NO. 16037.00 DWG FILE BASE C-100

A. GENERAL

- All soil erosion and sediment control will be done in accordance with: (1) the Maine Erosion and Sediment Control Handbook: Best Management Practices, Maine Department of Environmental Protection (MEDEP), October 2016.
- The site contractor (to be determined) will be responsible for the repair/replacement/maintenance of all erosion control measures until all disturbed areas are stabilized.
- Disturbed areas will be permanently stabilized within 7 days of final grading. Disturbed areas not to be worked upon within 14 days of disturbance will be temporarily stabilized within 7 days of the disturbance.
- In all areas, removal of trees, bushes and other vegetation, as well as disturbance of topsoil will be kept to a minimum while allowing proper site operations.
- Any suitable topsoil will be stripped and stockpiled for reuse as directed by the owner. Topsoil will be stockpiled in a manner such that natural drainage is not obstructed and no off-site sediment damage will result. In any event, stockpiles will not be located within 100 feet of wetlands and will be at least 50 feet upgradient of the stockpile's perimeter silt fence. The sideslopes of the topsoil stockpile will not exceed 2:1. Silt fence will be installed around the perimeter of all topsoil stockpiles. Topsoil stockpiles will be surrounded with siltation fencing and will be temporarily seeded with Aroostook rye, annual or perennial ryegrass within 7 days of formation, or temporarily mulched.

B. TEMPORARY MEASURES

1. STABILIZED CONSTRUCTION ENTRANCE/EXIT

A crushed stone stabilized construction entrance/exit will be placed at any point of vehicular access to the site, in accordance with the detail shown on this sheet.

2. SILT FENCE

a. Silt fence will be installed prior to all construction activity, where soil disturbance may result in erosion. Silt fence will be erected at locations shown on the plans and/or downgrading of all construction activity.

b. Silt fences will be removed when they have served their useful purpose, but not before the upgradient areas have been permanently stabilized.

c. Silt fences will be inspected immediately after each rainfall and at least daily during prolonged rainfall. They will be inspected if there are any signs of erosion or sedimentation below them. Any required repairs will be made immediately. If there are signs of undercutting at the center or the edges, or impounding of large volumes of water behind them, they will be replaced with a temporary crushed stone check dam.

d. Sediment deposits will be removed after each storm event if significant build-up has occurred or if deposits exceed half the height of the barrier.

3. STONE CHECK DAMS

Stone check dams will be installed in grass-lined swales and ditches during construction.

4. BARK MULCH SEDIMENT BARRIER

a. Where approved, bark mulch sediment barriers may be used as a substitute for silt fence. See the details in this drawing set for specifications.

b. Rock Filter Berms: To provide more filtering capacity or to act as a velocity check dam, a berm's center can be composed of clean crushed rock ranging in size from the french drain stone to riprap.

5. TEMPORARY SEEDING

Stabilize disturbed areas that will not be brought to final grade for a year or less and reduce problems associated with mud and dust production from exposed soil surface during construction with temporary vegetation.

6. TEMPORARY MULCHING

Use temporary mulch in the following locations and/or circumstances:

- In sensitive areas (within 100 feet of streams, wetlands and in lake watersheds) temporary mulch will be applied within 7 days of exposing spill or prior to any storm event.
- Apply temporary mulch within 14 days of disturbance or prior to any storm event in all other areas.
- Areas, which have been temporarily or permanently seeded, will be mulched immediately following seeding.
- Areas which cannot be seeded within the growing season will be mulched for over-winter protection and the area will be seeded at the beginning of the growing season.
- Mulch can be used in conjunction with tree, shrub, vine, and ground cover plantings.
- Mulch anchoring will be used on slopes greater than 5 percent in late fall (past October 15), and over-winter (October 15 - April 15).

The following materials may be used for temporary mulch:

- Hay or Straw material shall be air-dried, free of seeds and coarse material. Apply 2 bales/1,000 sf or 1.5 to 2 tons/acre to cover 90% of ground surface.
- Erosion Control Mix: It can be used as a stand-alone reinforcement:
 - on slopes 2 horizontal to 1 vertical or less;
 - on frozen ground or forested areas; and
 - at the edge of gravel parking areas and areas under construction.
- Erosion control mix alone is not suitable:
 - on slopes with groundwater seepage;
 - at low points with concentrated flows and in gullies;
 - at the bottom of steep perimeter slopes exceeding 100 feet in length;
 - below culvert outlet aprons; and
 - around catch basins and closed storm systems.
- Chemical Mulches and Soil Binders: Wide ranges of synthetic spray-on materials are marketed to protect the soil surface. These are emulsions that are mixed with water and applied to the soil. They may be used alone, but most often are used to hold wood fiber, hydro-mulches or straw to the soil surface.

e. Erosion Control Blankets and Mats: Mats are manufactured combinations of mulch and netting designed to retain soil moisture and modify soil temperature. During the growing season (April 15 to October 15) use mats indicated on drawings or North American Green (NAG) S75 (or mulch and netting) on:

- the base of grassed waterways;
- steep slopes (15 percent or greater); and
- any disturbed soil within 100 feet of lakes, streams, or wetlands.

During the late fall and winter (October 15 to April 15) use heavy grade mats indicated on drawings for NAG SC250 on all areas noted above plus use lighter grade mats NAG S75 (or mulch and netting) on:

- sideslopes of grassed waterways; and
- moderate slopes (between 8 and 15 percent).

7. TEMPORARY DUST CONTROL

To prevent the blowing and movement of dust from exposed soil surfaces, and reduce the presence of dust, use water or calcium chloride to control dusting by preserving the moisture level in the road surface materials.

8. CONSTRUCTION DE-WATERING

a. Water from construction de-watering operations shall be cleaned of sediment before reaching wetlands, water bodies, streams or site boundaries. Utilize temporary sediment basins, erosion control soil filter berms backed by staked hay bales, A Dirt Bag 55" sediment filter bag by ACF Environmental, or other approved Best Management Practices (BMP's).

b. In sensitive areas, near streams or ponds, discharge the water from the de-watering operation into a temporary sediment basin created by a surrounding filter berm of uncompacted erosion control mix immediately backed by staked hay bales (see the site details). Locate the temporary sediment basin at least 100 feet from the nearest water body, such that the filtered water will flow through undisturbed vegetated soil areas prior to reaching the water body or property line.

C. PERMANENT MEASURES

- Riprapped Aprons: All storm drain pipe outlets and the inlet and outlet of culverts will have riprap aprons to protect against scour and deterioration.
- Topsoil, Seed, and Mulch: All areas disturbed during construction, but not subject to other restoration (paving, riprap, etc.) will be loamed, limed, fertilized, seeded, and mulched.
 - Seeded Preparation: Use stockpiled materials spread to the depths shown on the plans, if available. Approved topsoil substitutes may be used. Grade the site as needed.
 - Seeding will be completed by August 15 of each year. Late season seeding may be done between August 15 and October 15. Areas not seeded or which do not obtain satisfactory growth by October 15, will be seeded with Aroostook Rye or mulched. After November 1, or the first killing frost, disturbed areas will be seeded at double the specified application rates, mulched, and anchored.

Mixture:	Roadside (lbs/acre)	Lawn (lbs/acre)
Kentucky Bluegrass	20	55
White Clover	5	0
Creeping Red Fescue	20	55
Perennial Ryegrass	5	15

- Mulch in accordance with specifications for temporary mulching.
- If permanent vegetated stabilization cannot be established due to the season of the year, all exposed and disturbed areas not to undergo further disturbance are to have dormant seeding applied and be temporarily mulched to protect the site.
- Ditches and Channels: All ditches on-site will be lined with North American Green S75 erosion control mesh (or an approved equal) upon installation of loam and seed.

D. WINTER CONSTRUCTION AND STABILIZATION

1. Winter excavation and earthwork will be completed so as to minimize exposed areas while satisfactorily completing the project. Limit exposed areas to those areas in which work is to occur during the following 15 days and that can be mulched in one day prior to any snow event. All areas will be considered denuded until the subbase gravel is installed in roadway areas or the areas of future loam and seed have been loamed, seeded, and mulched.

Install any added measures necessary to control erosion/sedimentation. The particular measure used will be dependent upon site conditions, the size of the area to be protected, and weather conditions.

To minimize areas without erosion control protection, continuation of earthwork operations on additional areas will not begin until the exposed soil surface on the area being worked has been stabilized.

- Natural Resource Protection: During winter construction, a double-row of sediment barriers (i.e., silt fence backed with hay bales or erosion control mix) will be placed between any natural resource and the disturbed area. Projects crossing the natural resource will be protected a minimum distance of 100 feet on either side from the resource.
- Sediment Barriers: During frozen conditions, sediment barriers may consist of erosion control mix berms or any other recognized sediment barriers as frozen soil prevents the proper installation of hay bales or silt fences.
- Mulching: All areas will be considered to be denuded until seeded and mulched. Hay and straw mulch will be applied at a rate of twice the normal accepted rate.

Mulch will not be spread on top of snow.

After each day of final grading, the area will be properly stabilized with anchored hay or straw or erosion control matting.

Between the dates of November 1 and April 15, all mulch will be anchored by either mulch netting, emulsion chemical, tracking or wood cellulose fiber.

5. Soil Stockpiling: Stockpiles of soil or subsoil will be mulched for over-winter protection with hay or straw at twice the normal rate or with a 4-inch layer of erosion control mix. This will be done within 24 hours of stocking and re-established prior to any rainfall or snowfall. Any soil stockpiles shall not be placed (even covered with mulch) within 100 feet from any natural resources.

6. Seeding: Dormant seeding may be placed prior to the placement of mulch or erosion control blankets. If dormant seeding is used for the site, all disturbed areas will receive 4 inches of loam and seed at an application rate of three times the rate for permanent seeding. All areas seeded during the winter will be inspected in the spring for adequate catch. All areas insufficiently vegetated (less than 75 percent catch) will be revegetated by replacing loam, seed, and mulch.

If dormant seeding is not used for the site, all disturbed areas will be revegetated in the spring.

7. Maintenance: Maintenance measures will be applied as needed during the entire construction season. After each rainfall, snow storm, or period of thawing and runoff, the site contractor will perform a visual inspection of all installed erosion control measures and perform repairs as needed to ensure their continuous function.

Following the temporary and/or final seeding and mulching, the contractor will, in the spring, inspect and repair any damages and/or bare spots. An established vegetative cover means a minimum of 85 to 90 percent of areas vegetated with vigorous growth.

E. OVER-WINTER CONSTRUCTION EROSION CONTROL MEASURES

1. Stabilization of Disturbed Soil: By October 15, all disturbed soils on areas having a slope less than 15 percent will be seeded and mulched. If the contractor fails to stabilize these soils by this date, then the contractor shall stabilize the soil for late fall and winter, by using either temporary seeding or mulching.

2. Stabilization of Disturbed Slopes: All slopes to be vegetated will be completed by October 15. The owner will consider any area having a grade greater than 15 percent (6.5H:1V) to be a slope. Slopes not vegetated by October 15 will receive one of the following actions to stabilize the slope for late fall and winter:

- Stabilize the soil with temporary vegetation and erosion control mesh.
- Stabilize the slope with erosion control mix.
- Stabilize the slope with stone riprap.

3. Stabilization of Ditches and Channels: All stone-lined ditches and channels to be used to convey runoff through the winter will be constructed and stabilized by November 15. Grass-lined ditches and channels will be complete by September 15. Grass-lined ditches not stabilized by September 15 shall be lined with either sod or riprap.


F. MAINTENANCE PLAN

1. Routine Maintenance: Inspection will be performed as outlined in the project's Erosion Control Plan. Inspection will be by a qualified person during wet weather to ensure that the facility performs as intended. Inspection priorities will include checking erosion controls for accumulation of sediments.

G. CONSTRUCTION SEQUENCE

In general, the expected sequence of construction for each phase is provided below. Construction is proposed to start in Spring 2017 and be complete in Fall 2017.


- Site preparation.
- Install temporary erosion control measures.
- Remove existing guardrail, subgrade, and culvert.
- Install new precast concrete arch and foundations, backfill, road subgrade and pavement. Reinstall guardrail.
- Perform site stabilization (complete roadway and bituminous pavement; loam, seed, and mulch, and install riprap embankment protection.) and other miscellaneous items.
- Clean sediment from temporary collection structures; complete construction of stormwater management structures
- Remove temporary erosion control measures after all disturbed areas are stabilized.

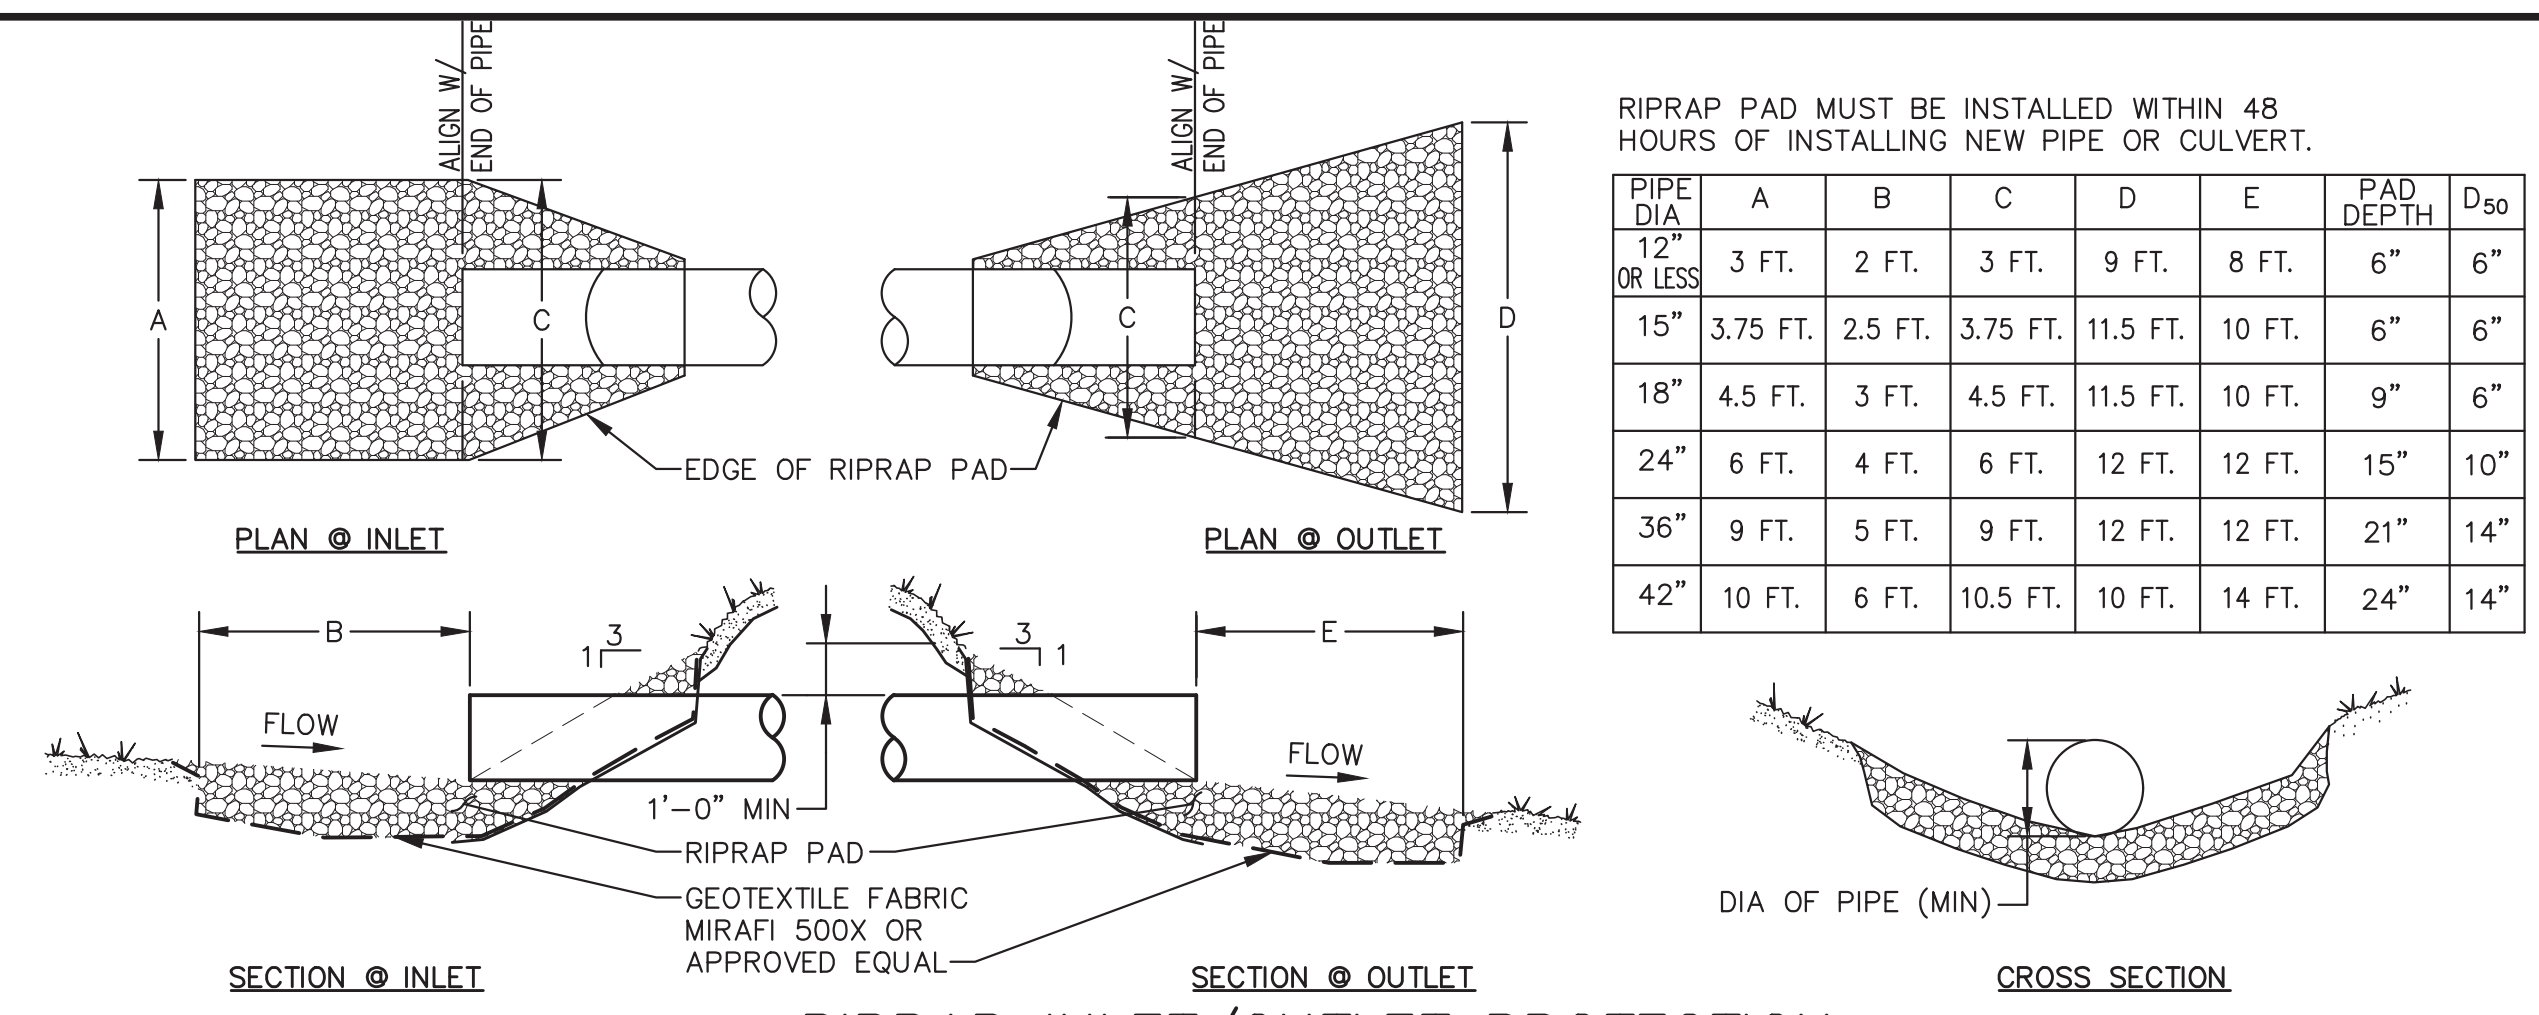

RIPRAP PAD MUST BE INSTALLED WITHIN 48 HOURS OF INSTALLING NEW PIPE OR CULVERT.


PIPE DIA OR LESS	A	B	C	D	E	PAD DEPTH	D ₅₀
12"	3 FT.	2 FT.	3 FT.	9 FT.	8 FT.	6"	6"
15"	3.75 FT.	2.5 FT.	3.75 FT.	11.5 FT.	10 FT.	6"	6"
18"	4.5 FT.	3 FT.	4.5 FT.	11.5 FT.	10 FT.	9"	6"
24"	6 FT.	4 FT.	6 FT.	12 FT.	12 FT.	15"	10"
36"	9 FT.	5 FT.	9 FT.	12 FT.	12 FT.	21"	14"
42"	10 FT.	6 FT.	10.5 FT.	10 FT.	14 FT.	24"	14"

RIPRAP INLET/OUTLET PROTECTION

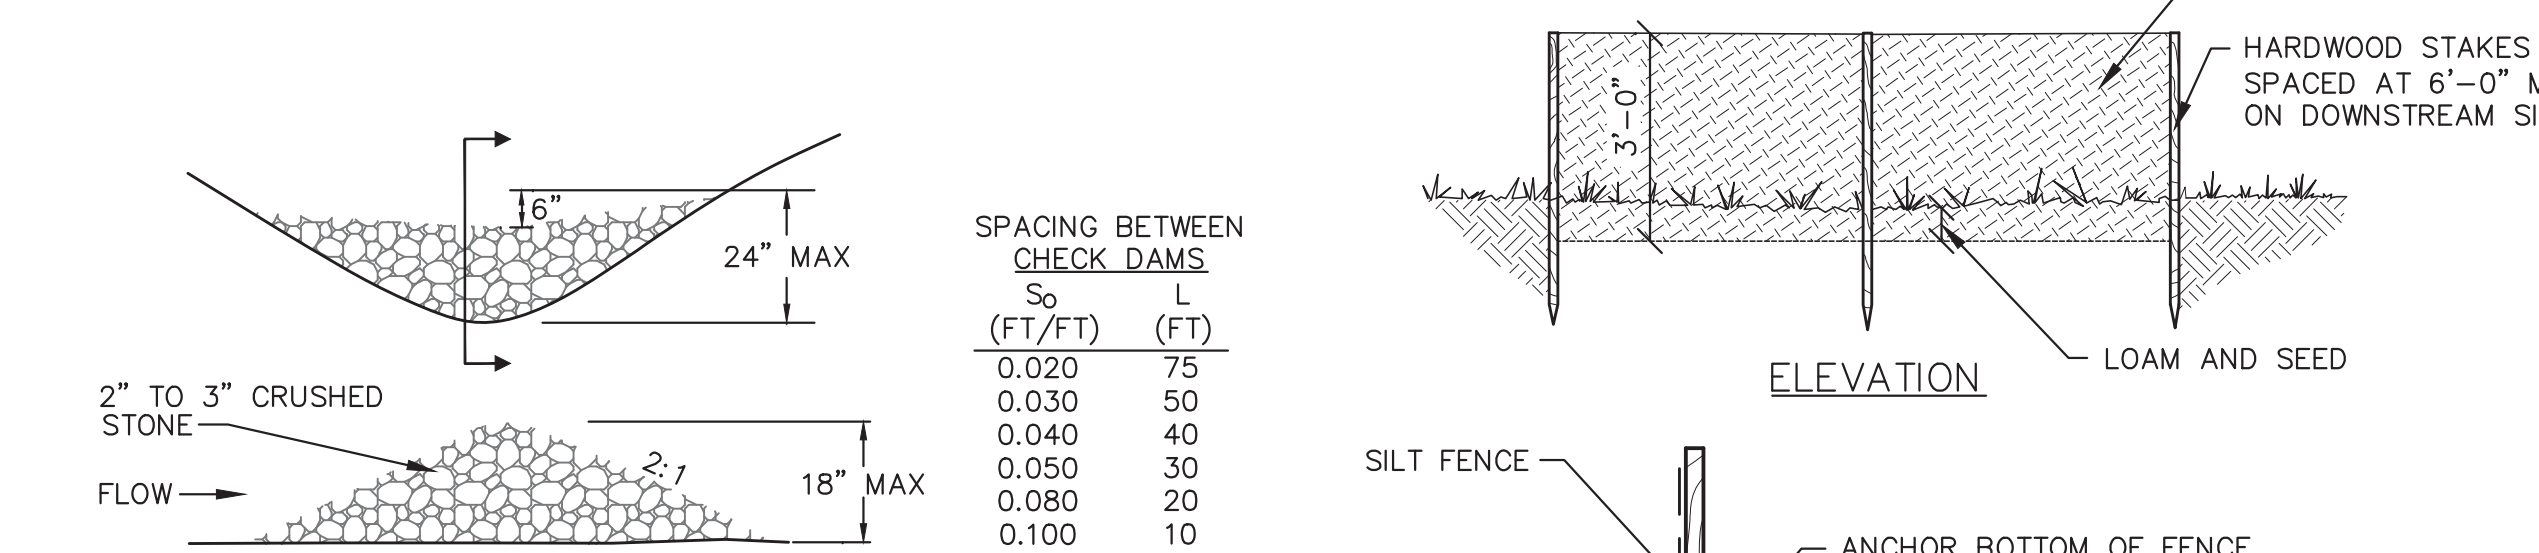



SPACING BETWEEN CHECK DAMS

S ₀ (FT/FT)	L (FT)
0.020	75
0.030	50
0.040	40
0.050	30
0.080	20
0.100	10




NOTE: USE AT ALL NEWLY CONSTRUCTED GRASS LINED DITCHES AS A TEMPORARY EROSION CONTROL MEASURE AND WHERE OTHERWISE NOTED ON PLANS.

STONE CHECK DAM

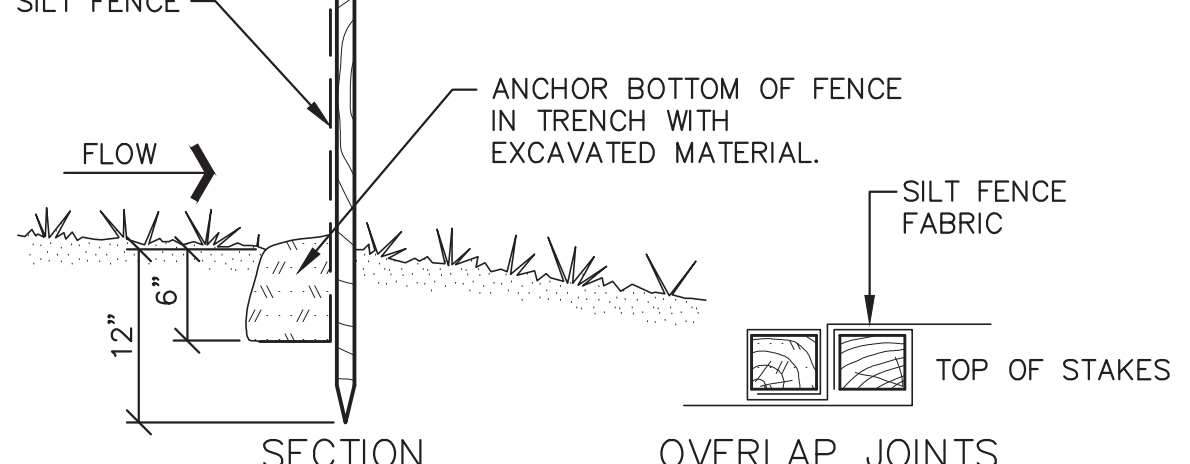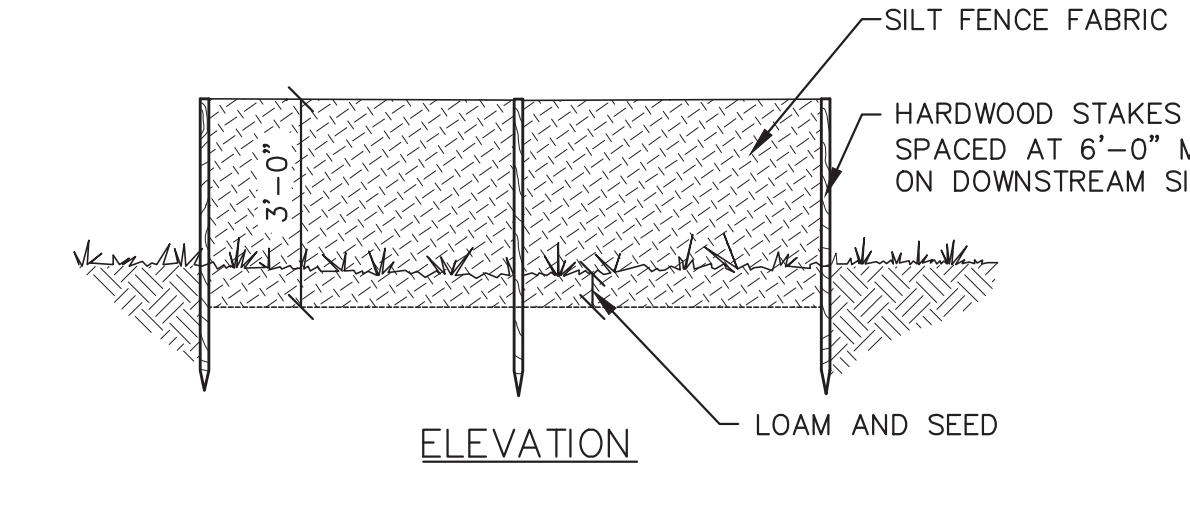

SILT FENCE

REV.	BY	DATE	STATUS
	JTR	5/17	ISSUED FOR BID
	JTR	3/17	ISSUED TO TOWN FOR APPROVAL

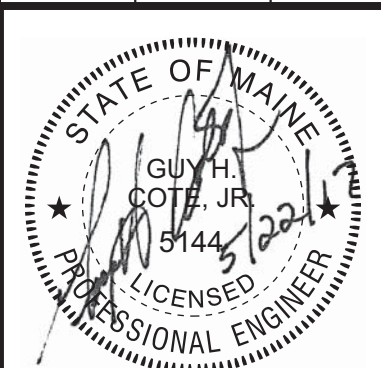

TOWN OF FREEPORT
CULVERT REPLACEMENT
HUNTER ROAD
FREEPORT, MAINE

EROSION CONTROL NOTES AND DETAILS

DESIGN BY: CEB
DRAWN BY: SJM
DATE: 3/2017
CHECKED BY:
LMN: NONE
CTB: SME-STD
JOB NO. 17032.00 DWG FILE DETAILS
C-300

ENVIRONMENTAL • CIVIL • GEOTECHNICAL • WATER • COMPLIANCE
4 Blanchard Road, PO Box 85A, Cumberland Center, Maine 04021
Phone 207.829.5016 • Fax 207.829.5692 • www.smeinc.com


CONSTRUCTION	USE
	BITUMINOUS HUNTER ROAD
	GRASS ALL DISTURBED AREAS

NOTES:

- HMA = HOT MIX ASPHALT.
MDOT = MAINE DEPARTMENT OF TRANSPORTATION.
- ALL COURSE THICKNESS AFTER FINAL COMPACTION.

SCHEDULE OF SURFACE FINISHES

NTS

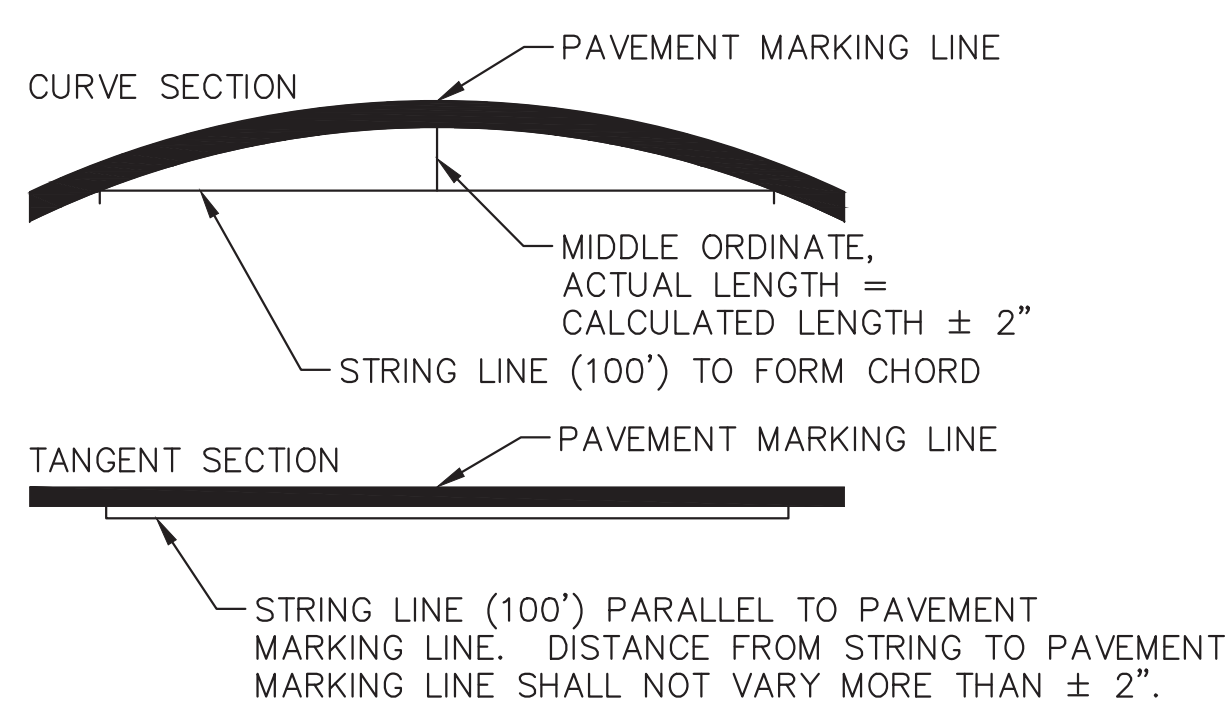

~ TOLERANCE FOR PAVEMENT MARKING LINES ~

GENERAL NOTES:

ALL PAVEMENT MARKINGS SHALL BE IN CONFORMANCE WITH THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS", U.S. DOT, FHWA, 1988.


SYMBOLS AND ARROWS:

STROKE WIDTH AND LINE WIDTH VARIANCE SHALL BE NO MORE THAN ±2" FROM DIMENSIONS SHOWN.

SQUARE FOOT DIMENSIONS SHOWN ARE PAY DIMENSIONS, PAID BY ITEM NO. 627.65.


PAVEMENT MARKING

NTS

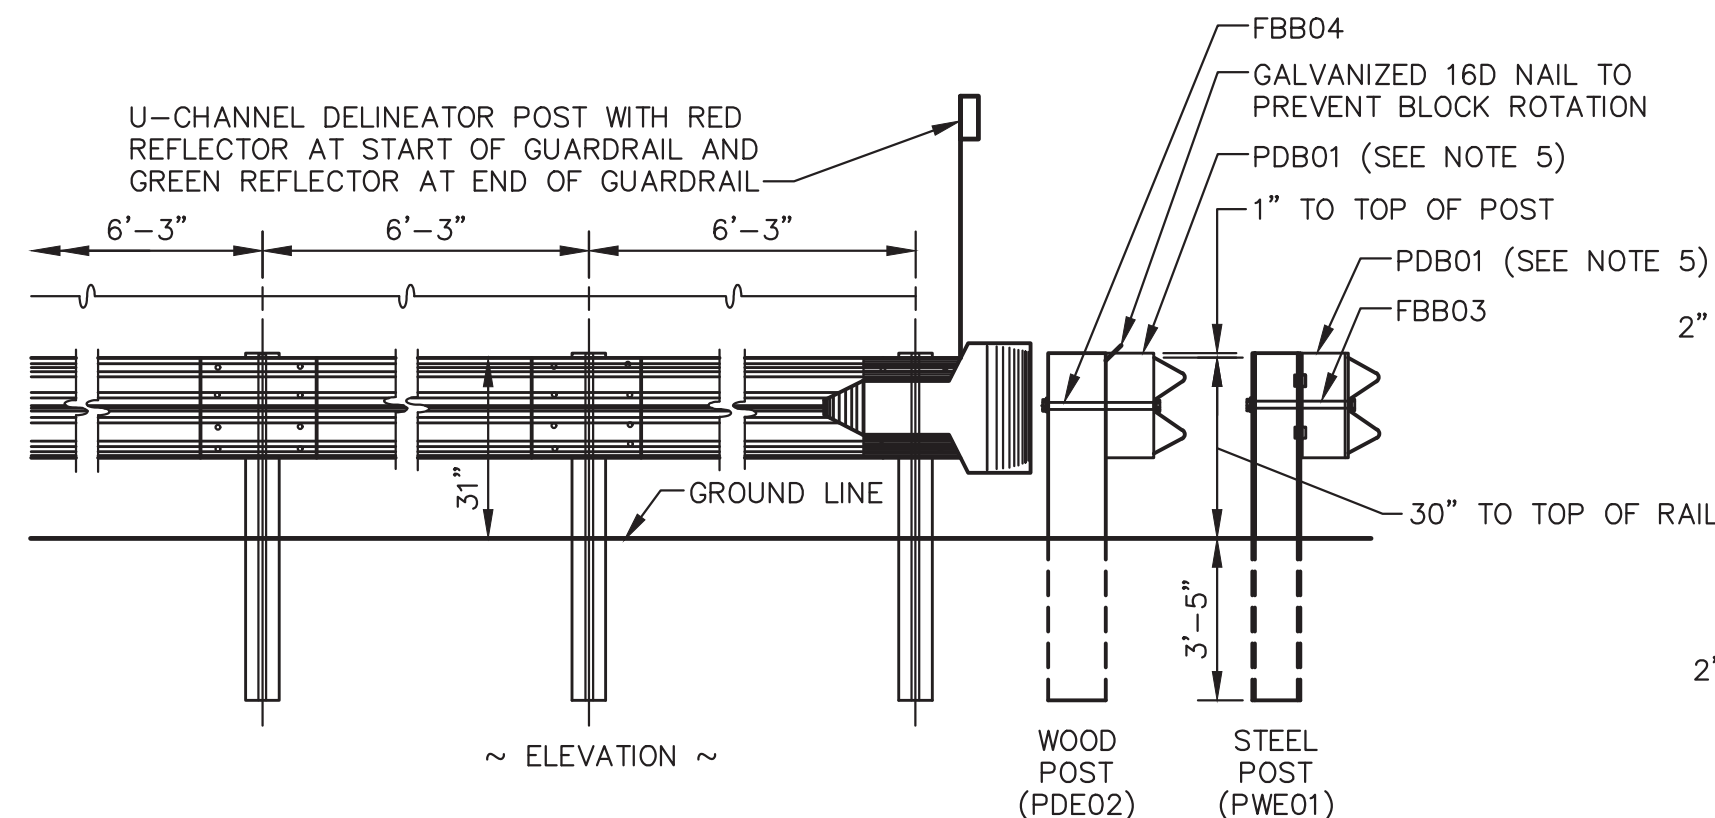


NOTE:


- INTERMEDIATE POST SPACING SHALL BE 6'-3" UNLESS OTHERWISE SHOWN.
- WOOD POSTS FOR GUARDRAIL SHALL BE 6" NOM. (5-1/2" MIN.) x 8" NOM. (7-1/2" MIN.) AND OFFSET BLOCKS SHALL BE 6" x 8" NOM. (5-1/2" x 7-1/2" MIN.).
- STEEL POSTS FOR GUARDRAIL SHALL BE W6x9.0 OR W6x8.5.
- STEEL POSTS PUNCHED WITH HOLES IN ADDITION TO THOSE SPECIFIED TO ACCOMMODATE OTHER TYPES OF GUARDRAIL, WILL BE ACCEPTED SUBJECT TO THE APPROVAL OF THE RESIDENT.
- COMPOSITE OFFSET BLOCKS MAY BE USED AS AN ALTERNATIVE TO WOOD OFFSET BLOCKS PROVIDED THAT THEY MEET NCHRP 350 REQUIREMENTS AND ARE INSTALLED ACCORDING TO MANUFACTURER'S SPECIFICATIONS.
- BEAM TYPE GUARDRAIL SET ON A RADIUS OF 150' OR LESS SHALL BE CIRCULAR GUARDRAIL.
- OFFSET BLOCKS SHALL BE INSTALLED ON ALL POSTS.

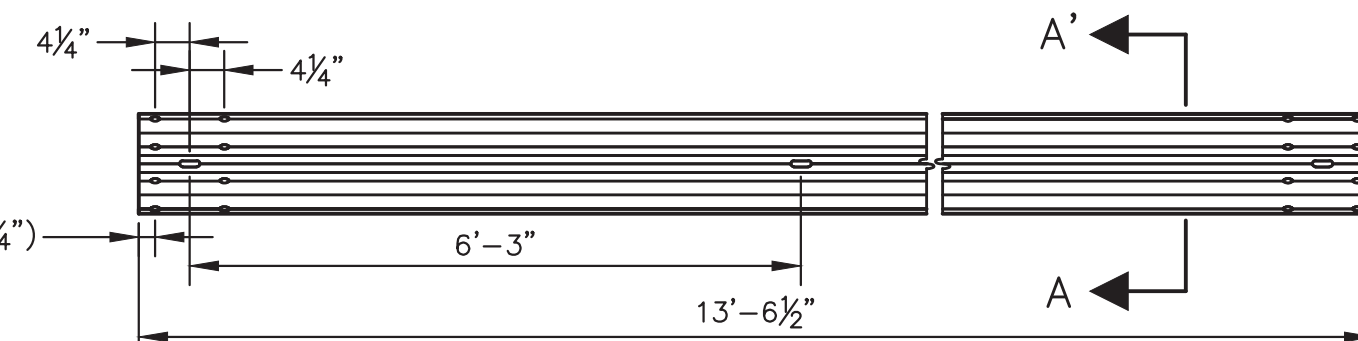

GUARDRAIL BEAM RWM02A
(MINIMUM THICKNESS 0.105")

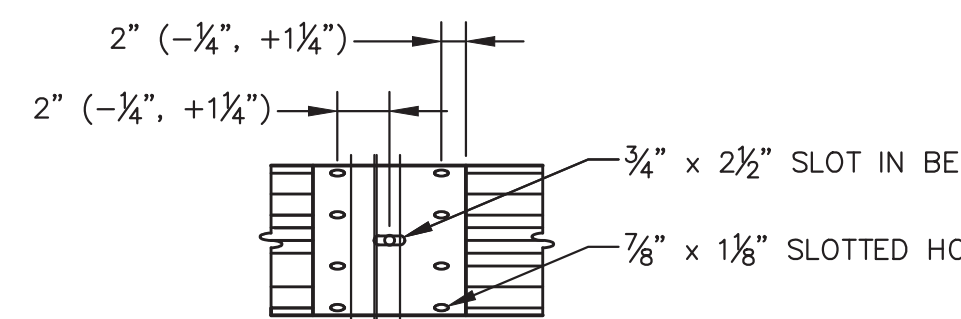


GUARDRAIL SPLICE AT POST

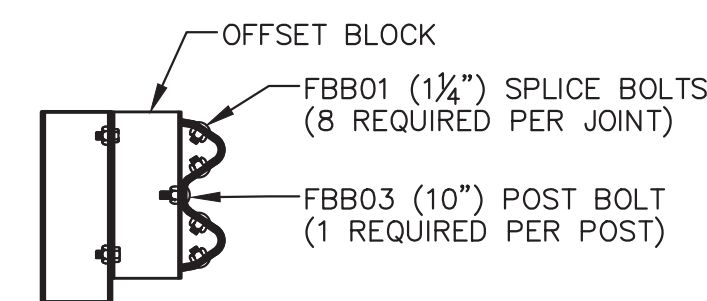

CROSS SECTION THROUGH GUARDRAIL SPLICE

GUARDRAIL
NTS

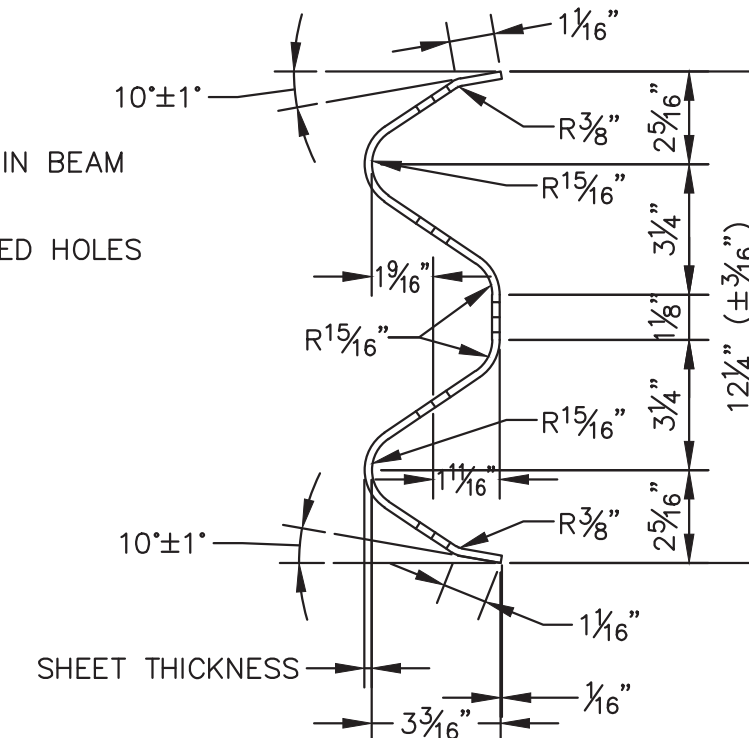

SECTION A-A'
(GUARDRAIL BEAM RWM02A)

REV.	BY	DATE	STATUS
JTR	5/17	ISSUED FOR BID	
JTR	3/17	ISSUED TO TOWN FOR APPROVAL	

TOWN OF FREEPORT
CULVERT REPLACEMENT
HUNTER ROAD
FREEPORT, MAINE

SECTIONS AND DETAILS

<p>ENVIRONMENTAL • CIVIL • GEOTECHNICAL • WATER • COMPLIANCE</p> <p>4 Blanchard Road, PO Box 85A, Cumberland Center, Maine 04021 Phone 207.829.5016 • Fax 207.829.5692 • www.smemaine.com</p>	<p>DESIGN BY: CEB</p> <p>DRAWN BY: SJM</p> <p>DATE: 3/2017</p> <p>CHECKED BY:</p> <p>LMN: NONE</p> <p>CTB: SME-STD</p>
<p>JOB NO. 17032.00 DWG FILE DETAILS</p>	<p>C-301</p>